


SFX/ISP2-LSZH-WHT

ISP2 2pr 22AWG Individual Foil Screen 600V White LSZH (8723)

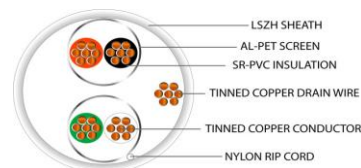

Cable Construction	
	2 Pairs
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7
Stranded Diameter (mm)	0.76
Insulation	
	PE
Insulation Thickness (mm)	0.24
Insulation Diameter (mm)	1.20 ±0.10
Insulation Colours	Red,Black;Green,White
Al-PET Shield	≥115% (On each pair)
Drain Wire	
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7
Nylon Rip-Cord	White 210D
Jacket	
	LSZH
Jacket Thickness (mm)	0.550
Overall Diameter (mm)	4.30 ±0.20
Jacket Colour	White RAL 9003
Sheath Printing	ISP2 2x2x22AWG 600V Individually Screened LSZH RoHS2 (PO) (m)
Reaction to Fire	Eca
Electrical Characteristics	
Max Conductor DC resistance @ 20°C	<50Ω/km
Rated Temperature	70°C
Rated Voltage	600V
Insulation Resistance @20°C	>200MΩ/km