


SFX/TC-6-PVC-WHT

Budget 6pr CCS Telecom Cable White PVC

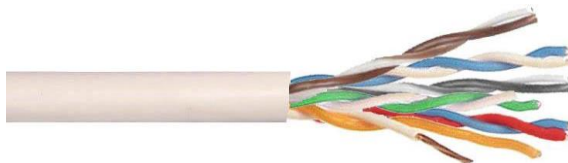

| Cable Construction | | 6 Pairs |
|------------------------------------|----------------------------|------------------------------|
| Conductor | Copper Clad Steel | |
| Conductor Diameter (mm) | 0.50 ±0.02 | |
| Insulation | PVC | |
| Insulation Thickness (mm) | 0.185 | |
| Insulation Diameter (mm) | 0.90 ±0.10 | |
| Insulation Colours and Lay (mm) | | |
| Pair 1; Pair 2 | White/Blue,Blue/White,53 | White/Orange,Orange/White,56 |
| Pair 3; Pair 4 | White/Green,Green/White,58 | White/Brown,Brown/White,61 |
| Pair 5; Pair 6 | White/Grey,Grey/White,64 | Red/Blue,Blue/Red,68 |
| Nylon Rip-Cord | | 210D |
| Jacket | PVC | |
| Jacket Thickness (mm) | 0.45 | |
| Overall Diameter (mm) | 5.70 ±0.20 | |
| Jacket Colour | White RAL 9003 | |
| Sheath Printing | CCS Telecom 6 PR RoHS2 (m) | |
| Reaction to Fire | Fca | |
| Electrical Characteristics | | |
| Max Conductor DC resistance @ 20°C | <501.9Ω/km | |
| Rated Temperature | 80°C | |
| Rated Voltage | 30V | |
| Insulation Resistance @20°C | >200MΩ/km | |