


**SFX/SPK-PRO-4C-14-LSZH-PUR**

Speaker Cable 4 Core BC 105x0.16mm 14AWG Purple LSZH

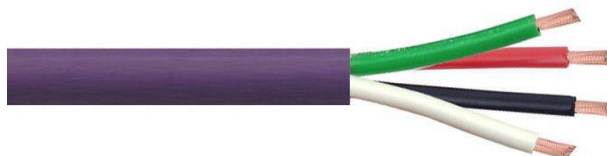

Cable Construction	
Conductor	4 Cores
Conductor Diameter (mm)	Bare Copper
Insulation	0.16 ±0.008 x 105
Insulation Thickness (mm)	LSZH
Insulation Diameter (mm)	0.46
Insulation Colours	2.80 ±0.10
Filler	Red,Black,White,Green
Jacket	None
Jacket Thickness (mm)	LSZH
Overall Diameter (mm)	0.80 ±0.01
Jacket Colour	8.60 ±0.10
Sheath Printing	Purple RAL 4005
Reaction to Fire	Secure Sound 4C 14AWG Speaker LSZH RoHS2 (PO) (m)
Electrical Characteristics	
Max Conductor DC resistance @ 20°C	Fca
Rated Temperature	<8.82Ω/km
Rated Voltage	70°C
Insulation Resistance @20°C	300V
	>200MΩ/km